


DGD1316



TRIBRID 16CH HD CCTV DVR

FEATURES

Free P2P Cloud EaZy Networking*

- ❖ Cloud EaZy Networking available to connect this device to Internet automatically in three steps with our free mobile app, EagleEyes.
- ❖ The "Buddy" feature to share the device access permission to other people.
- ❖ Device login / out notifications reported.



Video Backup


- ❖ Regular backup could be configured to automatically copy video footages to the specified location (USB drive or FTP) at the specified time.

Remote Surveillance

- ❖ Fully compatible with iOS and Android devices, and Internet Explorer on Windows operating system
- ❖ CMS Lite for 24 devices central management
- ❖ Applicable also to Apple's media player, QuickTime.

Tribrid Video Input

- ❖ Supports Analog HD / TVI / 960H video input.
- ❖ Up to 1080P recording

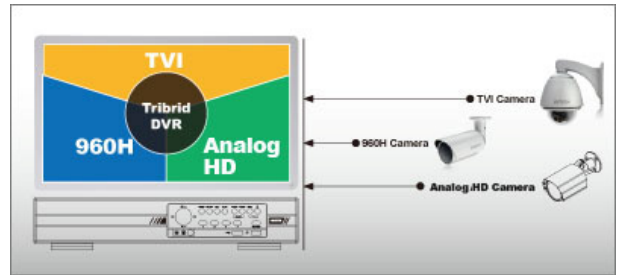


Push Status - Active Event Notification with EagleEyes App

- ❖ Push Status to send instant notifications for system events, such as video loss or HDD data removal.



REAR PANEL

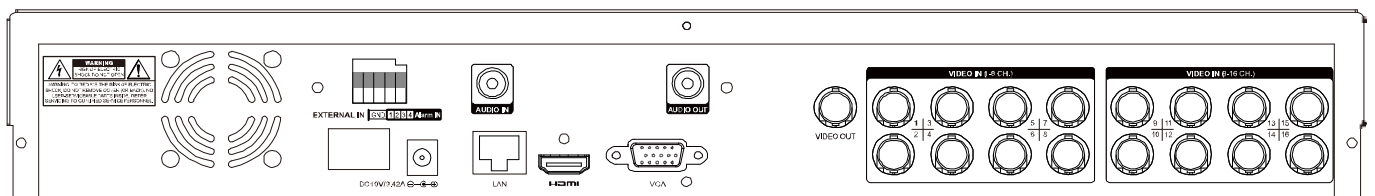

* EaZy Networking is a free P2P cloud service to connect AVTECH devices to the Internet automatically by plug-and-play, enabling you to check the live view via your mobile device or laptop at anytime (in 64 kbps).

▶ SPECIFICATIONS

| ▼ Video | |
|--------------------------------|---|
| Video System | NTSC / PAL (auto detection) |
| Video Compression Format | H.264 |
| Video Signal | Analog HD / TVI / 960H |
| Video Input | 16 channels (Composite video signal 1 Vp-p 75Ω BNC) |
| Video Output | BNC YES VGA YES HDMI YES |
| Video Resolution | 1080P / 720P / QHD / 960H / Frame / Field / CIF |
| ▼ Record & Backup | |
| Max. Recording Rate | Up to 240 IPS @ 1920 x 1080 Up to 480 IPS @ 1280 x 720 |
| Recording Mode | Manual / Timer / Motion / Alarm / Remote |
| Pre-alarm Recording | YES |
| Playback Channel | 16CH |
| Quick Search | Time / Motion / Alarm search mode |
| Backup Device | USB 2.0 drive / Network |
| Regular Backup | YES |
| ▼ Audio | |
| Audio Input | 1 audio input |
| Audio Output | 1 audio output (Mono) |
| ▼ General | |
| Hard Disk Storage | 6TB SATA HDD x 3 |
| SATA Interface | YES |
| Image Quality Setting | SUPER BEST / BEST / HIGH / NORMAL |
| USB Mouse Control | YES |
| Motion Detection Area | 16 × 12 grids per channel |
| Motion Detection Sensitivity | 3 adjustable parameters for accurate detection |
| Event Notification | Push Status / FTP / E-Mail |
| Picture Zoom | 2X digital zoom |
| PTZ Control | YES |
| Alarm I/O | 4 inputs |
| IR Remote Control | YES (IR receiver built-in) |
| Key Lock (Password Protection) | YES |
| User Level | 4 user levels for different access privilege |
| Video Loss Detection | YES |
| Camera Title | Supports up to 25 letters |
| Video Adjustable | Hue / Saturation / Contrast / Brightness |
| Date Display Format | YY/MM/DD, DD/MM/YY & MM/DD/YY |
| Daylight Saving | YES |
| Power Source (±10%) | 19V / 3.42A |
| Operating Temperature | 10°C ~ 40°C (50°F ~ 104°F) |
| Operating Humidity | 10% ~ 85% |
| Dimensions (mm)*** | 430(W) x 65(H) x 438(D) |
| Net Weight (kg) | 4 |

▶ SPECIFICATIONS

| ▼ Network | |
|-------------------------------------|---|
| Ethernet | 10/100 Base-T. Supports remote control and live view via Ethernet |
| Network Protocol | TCP/IP, PPPOE, DHCP and DDNS |
| ▼ Remote Surveillance from PC | |
| Compatible Operating System | Windows & MAC |
| Compatible Program | Web Browser: Internet Explorer, Google Chrome & Safari |
| | CMS Lite: 24CH central management software for Windows OS |
| | QuickTime: For both Windows and MAC operating systems |
| Max. online users | 20 |
| Web Transmitting Compression Format | H.264 |
| Network Live Audio | YES |
| Remote Independent Operation | YES |
| Remote Event Download & Playback | YES |
| ▼ Mobile Surveillance | |
| App | EagleEyes |
| Compatible Devices | iOS & Android devices |
| Push Status | YES |
| ▼ Others | |
| EaZy Networking | YES |
| DCCS Support | YES |
| AVTECH Free DDNS service | YES |
| Privacy Mask | YES |
| Multiplex Operation | Live display / record / playback / backup / network operations |
| System Recovery | System auto recovery after power failure |
| Optional Peripherals | HDMI Matrix (HDM02) / USB Joystick (AVX102) |

* The specifications are subject to change without notice.

** Dimensional tolerance: ±5mm